


11021 WILLINGHAM DRIVE • HUNTSVILLE, AL 35803 • PHONE: 1-800-734-6268 http://www.shuttercontractor.com

Product Specification Sheet

Mid-America Vinyl Shutters Style P3 Raised Panel Exterior Shutters

This guide is intended to help answer any questions about specific dimensions of the vinyl shutters you will receive. Please note that the plastic shutter manufacturing process is not exact. All sizes are nominal and may vary slightly from one shutter color to the next.

If you are installing your outdoor shutters in a cavity or next to an obstruction and you require an exact shutter width, we recommend that you call us for an exact width measurement before ordering the custom window shutters, as sometimes the actual exterior shutter width is slightly wider than what is specified.

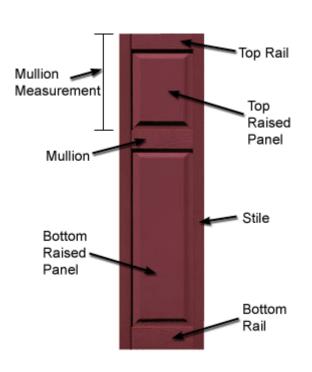

Stiles

Shutter Width	Stile Width
9 ¼", 12", 14 ½",	2"
16 ½"	
18"	2 3/4"

Top Rail

Shutter Width	Top Rail Height
12"	2"
9 ¼", 14 ½", 16 ½", 18"	3"

Mullion (Mid Rail)

Shutter Width	Mullion Height
All Widths	3"

Bottom Rail

Shutter Width	Bottom Rail Height
All Widths	4"

Shutter Depth (Thickness): 1"

Available Widths: 9 $\frac{1}{4}$ ", 12", 14 $\frac{1}{2}$ ", 16 $\frac{1}{2}$ " and 18" Available Heights: From 22" to 110" in $\frac{1}{4}$ " increments

The maximum height of any one panel section is 50" without the top rail, mullion, or bottom rail.



11021 WILLINGHAM DRIVE • HUNTSVILLE, AL 35803 • PHONE: 1-800-734-6268 http://www.shuttercontractor.com

Product Specification Sheet

Mid-America Vinyl Shutters Style P3 Raised Panel Exterior Shutters

For P3 style shutters, the mullion position is adjustable. You may specify the height from the top of the vinyl shutter to the top of the mullion to the nearest 1" increment. Note that the mullion height is 3", so if you need to align the center of the mullion to the center of your window mid rail, measure from the top of your window to the center of your window mid rail and then subtract $1 \frac{1}{2}$ ".